


Defense

SEAGUARDIAN EOSS-8a
Electro-Optical Surveillance System

Astim
FOR A SAFER WORLD

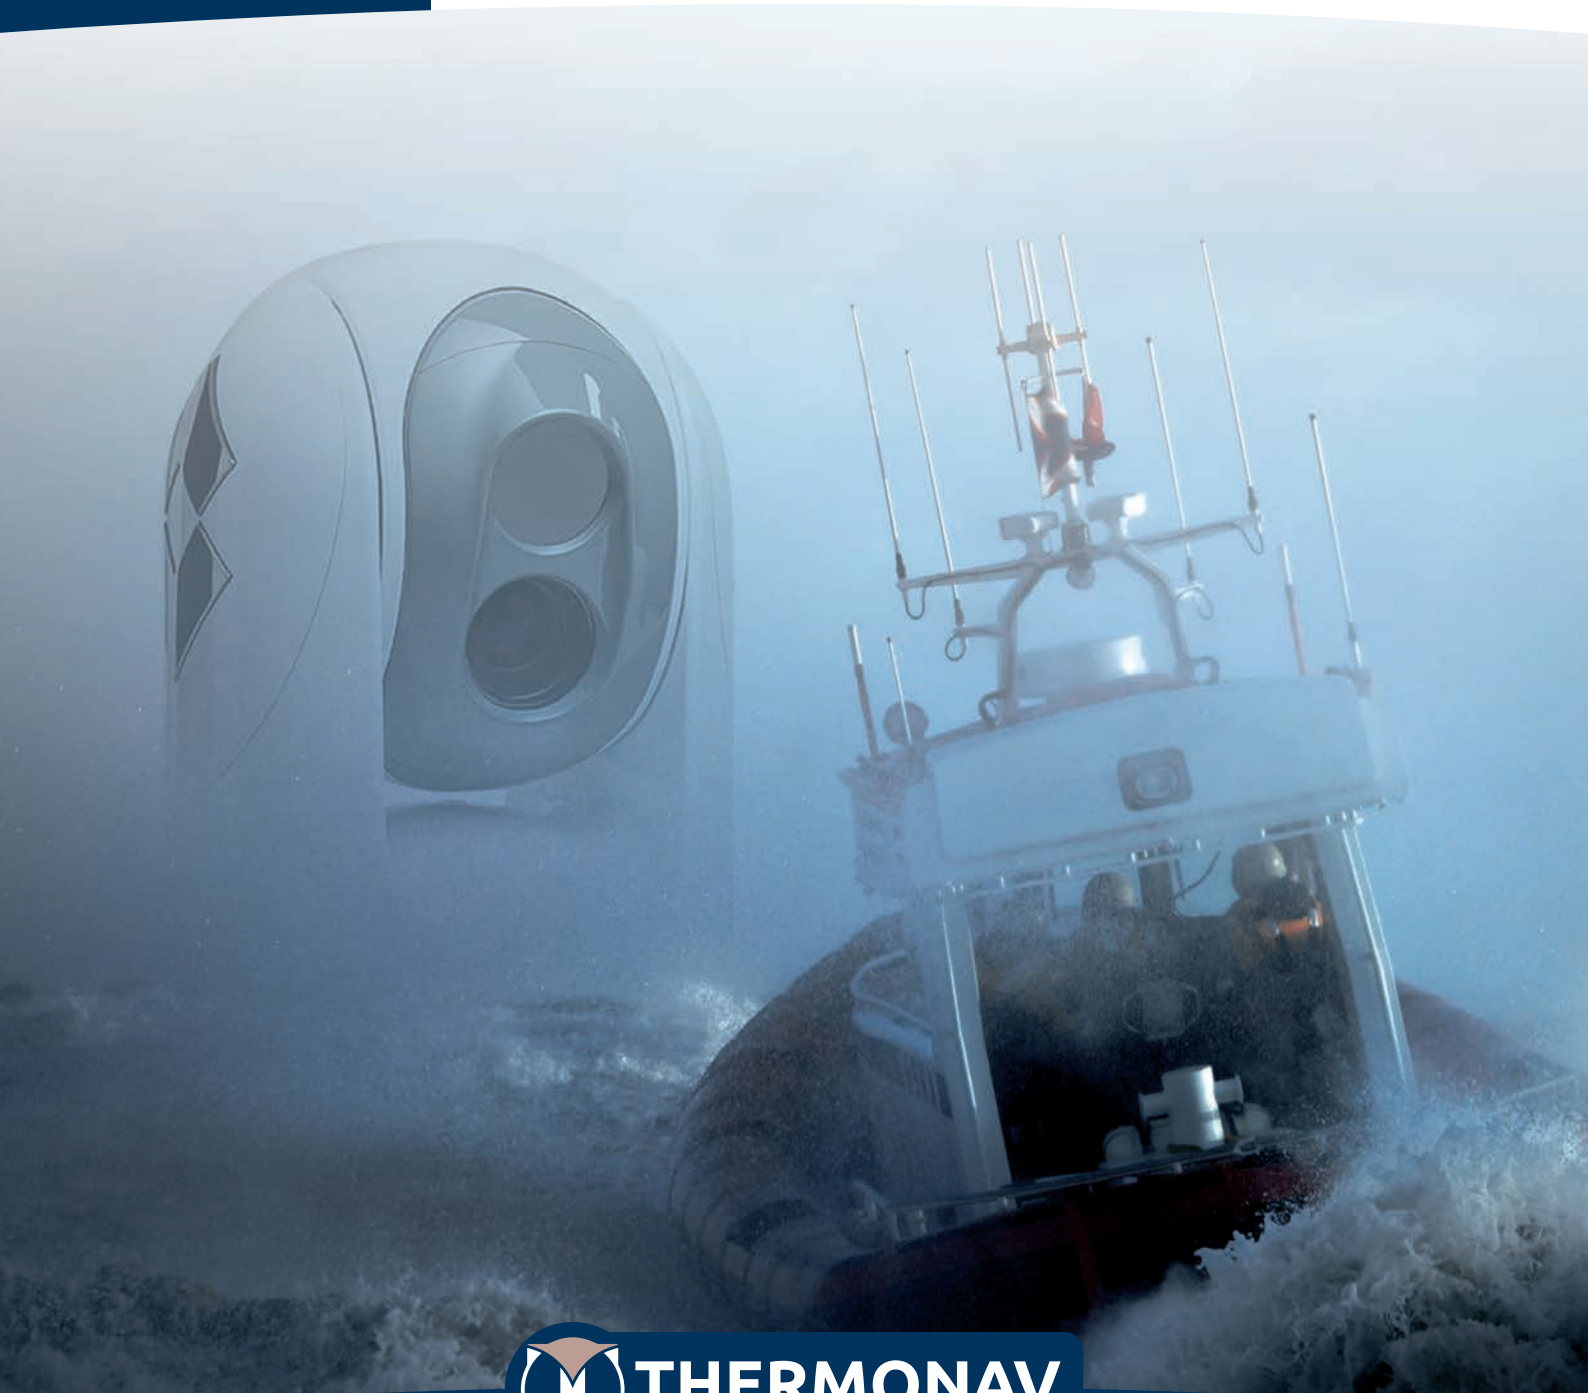

 **THERMONAV**
powered




SeaGuardian EOSS-8a is a state-of-the-art solution for observation sight. Based on FLIR M617CS gimbal, SeaGuardian EOSS-8a is a compact, high performance, new generation medium range multi-sensor system managed by a MIL-SPEC compliant console with advanced features for search and rescue operations, maritime patrol, sea control, border security, homeland protection and surveillance operations. SeaGuardian EOSS-8a is equipped with a complete sensor suite comprising of a LWIR thermal camera with digital zoom and color TV camera with continuous optical zoom. SeaGuardian EOSS-8a can be integrated into SeaGuardian TMS – Tactical Mission System.

Key Features

Advanced Sensor for Short and Medium Range Sight	Complete sensor suite providing multi-spectral coverage (TI and TV)
Automatic Object Detection and Target Tracking	Video Tracking (multiple algorithm capability: Centroid, Correlation, Scene, Phase Correlation, Combined), Multiple Target Track, Moving Target Detection Radar/AIS Tracking (multiple algorithm capability: Track Engage, Track Scan, Track Last, Track Cursor), Target Classification and Data Fusion with automated capture of target snapshot images
Image Enhancement	Advanced real-time digital HD image processing engine (multiple algorithm capability: Electronic Image Stabilization, Image Blending, Digital Contrast Enhancement, Highlights Target, IR/TV Image Fusion, Local Area Contrast Processing, Edge Sharpening, Image Noise Reduction, Picture In Picture)
GEO-Lock	GEO Pointing, GEO Location, GEO Tracking
Surveillance Mode	Real-time Video Panorama Stitching with marked detected target and relative info, Azimuth Scan Sectors, Scan List Preset Points
Mission Recorder	Mini-VDR (Voyager Data Recorder with selectable sampling 2+99sec): Data & Time (UTC), Ship Position (GNSS LAT/LON and Mission Grid Map), Heading, Speed, Gimbal Orientation (Azimuth, Elevation), FOV (Field of View), Video Channel Used (IR/TV) (up to 365 days) Recording and Playback of Encrypted and Georeferenced Videos and Photos (days selectable at the order) Event and Warning Datalog (up to 365 days)
Advanced Encryption	AES-256
Power Distribution, Data Connection and CPU	High performance rugged CPU for Signal and Image Processing (Video Input: PAL, NTSC), Rugged Power Distribution and Data Connection Unit
Built-In Test (BIT)	Multiple algorithm capability: Power-up, Periodic, Initiated
Smart Integrations	Searchlight slaving for Search & Rescue (SAR) or Oil Spill Detection (OSD) missions Output data and videos over ethernet (H.264 video compression) Optionally: Smart glasses for visualizing images, navigation data and target information in Augmented Reality (AR) mode



SeaGuardian EOSS-8a System Configuration

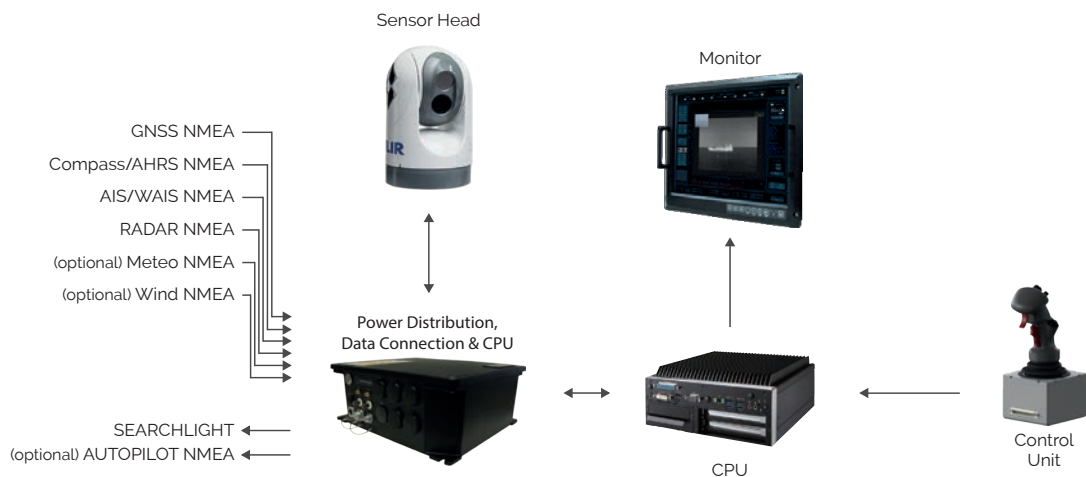

Range Performance

	Identification		Recognition	Detection	
	280m	500m	1.5Km		
		1.2Km	1.8Km	3.9Km	
			3.9Km	6.5Km	15.5Km

Technical Specification

Gimbal (TCU)	Specifications
Size	178mm diameter
Number of Axis	2 axis, active gyro-stabilization
Weight	Approx. < 5Kg
AZ Coverage	N x 360° continuous
EL Coverage	+90° to -90°

Color TV Camera	Specifications
Sensor Type	1/4" Color CCD
Lines of Resolution	530
Minimum Illumination	1.4 lx
Optical Zoom	36x
Continuous E-Zoom	12x

Infrared Camera	Specifications
Detector Size	640 x 512 px
Detector Technology	VOx Microbolometer
Spectral Wavelength	7 + 14 μm
FOV	17° x 14°
Focal Length	35mm
Continuous E-Zoom	2x 4x

Electrical Requirements	Specifications
Input Voltage	22+36V Wide Range Input Voltage



Astim

FOR A SAFER WORLD



Defense
Security
Naval
Industry

+39.0544.471645 - info@astim.it - Via Filippo Re, 15/A - 48124 RAVENNA Italy - ASTIM.IT

THERMONAV® is a registered trademark, exclusively property of AST.I.M. S.r.l.
It is forbidden the reproduction, even partially by any means including photocopying, even for unauthorized internal educational use.